



C6 II · 375-395W MWT Mono PERC Half-Cut Module

21.1%

Module efficiency up to 21.1%

Features



Innovative Layout

Innovative back contact module layout with asymmetric design for higher efficiency power



High Efficiency

Busbar-free design increases cell conversion efficiency, more power output can be achieved at low irradiance conditions



High Reliability

Conductive back sheet's 2D encapsulation avoids welding stress and micro crack, resulting lower degradation under multiple harsh testing conditions



High ROI

Single-glass modules with global 30-year performance warranty bring higher return on investment



Aesthetic Design

The design of busbar and tapping ribbon free makes module more aesthetic



Lead Free


Eco-friendly PV design achieves lead-free MWT module without soldering materials

Reinsurance Coverage for 30 Years



Insured by PAIC and LLOYD'S

PING AN LLOYD'S

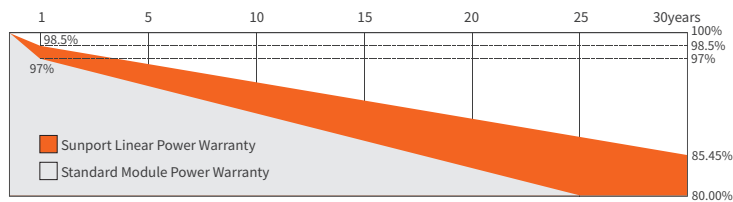

※1st year degradation less than 1.5%, 30 years linear power output 85.45% guaranteed.

Comprehensive Qualifications & Certifications

- ★CQC Top Runner Advanced Technology Certification (4A class)
- ★ISO 9001:2015 Quality Management System
- ★ISO 45001:2018 Occupation Health Safety Management System

- ★TUV NORD Certification
- ★ISO 14001:2015 Environment Management System



هيئة كهرباء ومياه دبي
Dubai Electricity & Water Authority



Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP375QHEH	SPP380QHEH	SPP385QHEH	SPP390QHEH	SPP395QHEH
Max-Power(Pm)	W	375	380	385	390	395
Power Tolerance	W			0~+5		
Max-Power Voltage(Vm)	V	35.5	35.7	35.9	36.1	36.3
Max-Power Current(I _m)	A	10.57	10.65	10.73	10.81	10.89
Open-Circuit Voltage(Voc)	V	42.8	43.0	43.2	43.4	43.5
Short-Circuit Current(Isc)	A	11.10	11.18	11.26	11.34	11.42
Module Efficiency(η _m)	%	20.1	20.3	20.6	20.9	21.1
STC: AM=1.5, Irradiation 1000W/m², Module Temperature 25°C Power Tolerance ±3%						

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP375QHEH	SPP380QHEH	SPP385QHEH	SPP390QHEH	SPP395QHEH
Max-Power(Pm)	W	282	286	290	294	298
Max-Power Voltage(Vm)	V	32.7	32.9	33.1	33.3	33.5
Max-Power Current(I _m)	A	8.63	8.7	8.77	8.83	8.90
Open-Circuit Voltage(Voc)	V	40.0	40.2	40.4	40.6	40.8
Short-Circuit Current(Isc)	A	9.02	9.08	9.14	9.20	9.26
NMOT: Irradiation800W/m², Ambient temperature 20°C, Wind Speed 1m/s						


Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of P _{max}	-0.36%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of Isc	0.06%/°C

Package

Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40' HQ	864	36


I-V Curve

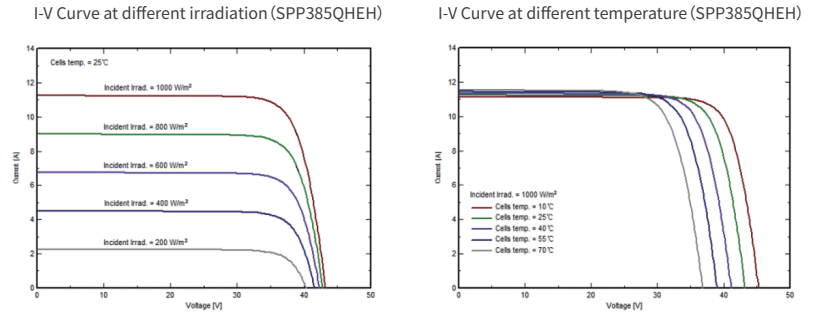

Mechanical Characteristics

Dimension(L×W×H)	1805mmx1035mmx30mm
Weight	20 kg
Glass Type	High Transmittance Anti-reflective Coated Tempered Glass /3.2mm
Solar Cell	126(21x6) / Mono / Half-cell
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Silver
Junction Box	IP68
Cable	4mm², 350mm (+) / 150mm (-); Customizable
Connector	MC4 Compatible

Module Size

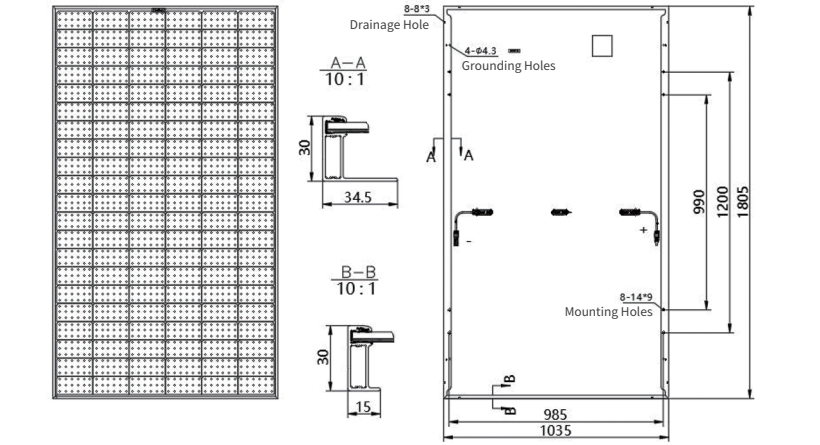

Operating Conditions

Max System Voltage	DC1500V(TUV)
Max Fuse Rated Current	20A
Operating Temperature Range	-40°C~+85°C
Mechanical Load	5400Pa (front) /2400Pa (rear)
Max Allowable Hail Load	φ25mm hail, from 1m of distance at 23 m/s
Application Class	Class A