



belinus[®] BELGIAN DESIGN
AND QUALITY 

M8 N-type HJT Ultra Black GlasGlas

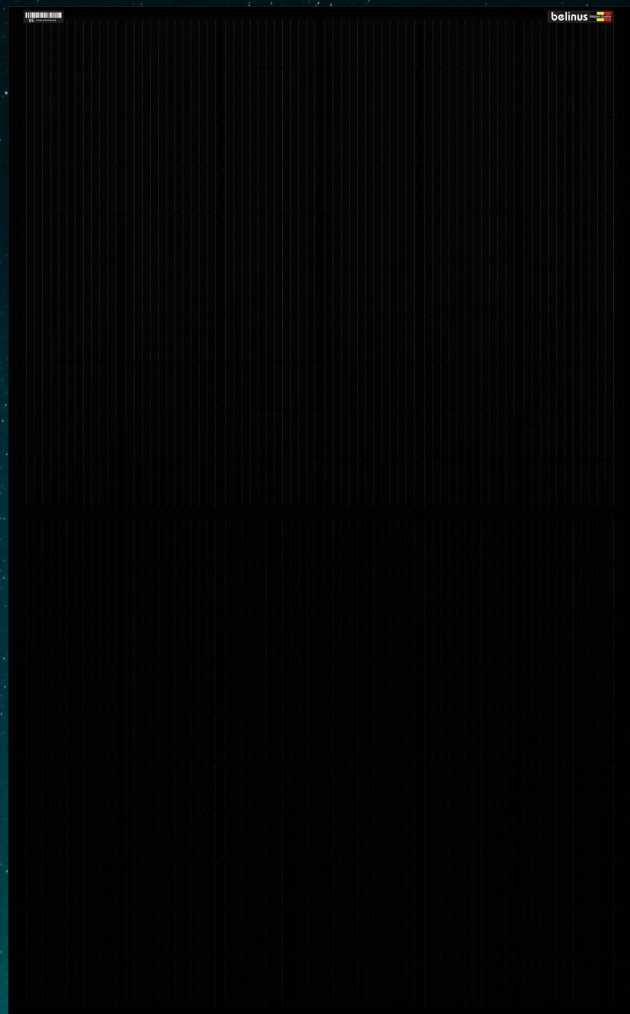

*Heterojunction technology
90% bifaciality*

100% power output guarantee for 35 years

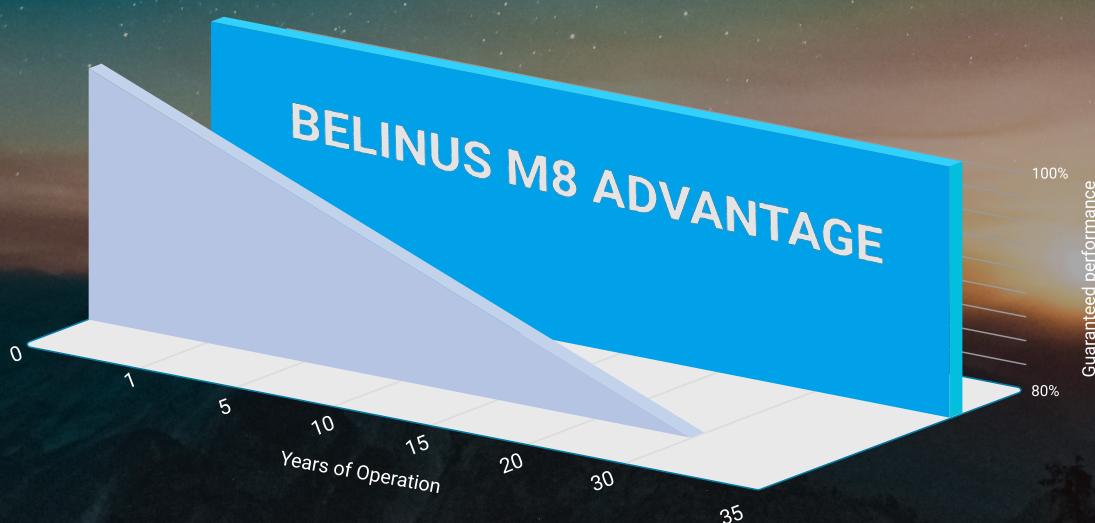

390WP
214^W/
M²



Mechanical Characteristics

Laminate Structure	Glass/ POE/ Cells/ POE/ Glass
Cell Type	HJT Mono 166 x 83 mm
Cell Connection	120 (60x2)
Module Dimensions	1755 x 1038 x 30 mm
Weight	23.5kg
Junction Box	Degree of protection IP68
Output Cable	4mm ² , 1200mm in length
Connectors Type	Staubli MC4
Frame	Anodised Aluminum Alloy
Encapsulant	POE
Front Load	5400 Pa
Real Load	2400 Pa
Glass Thickness	(F) 2.0mm DLAR Solar glass (B) 2.0mm Solar glass

Electrical Characteristics (STC*)


	Front	Extra Power (assuming 10% of reflected light to the back)
Maximum Power (Pmax)	390W	426
Max Module Efficiency(%)	21.4%	23.4%
Voltage at Max Power (Vmp)	37.2V	37.2V
Current at Max Power (Imp)	10.5A	11.5A
Open Circuit Voltage (Voc)	44.7V	44.7V
Short Circuit Voltage (Isc)	10.9A	12.1A
Operating Module Temperature	-40 to +85°C	
Maximum System Voltage	DC1500V	
Maximum Series Fuse	20A	
Rating Power Sorting	0~+5W	
Bifaciality (%)	90	

Qualifications and certificates



Certificates available upon special requests. Additional charges may apply.
Both the Belinus solar cells and solar modules are made by suppliers in the Bloomberg Tier 1 List.

Technical Characteristics

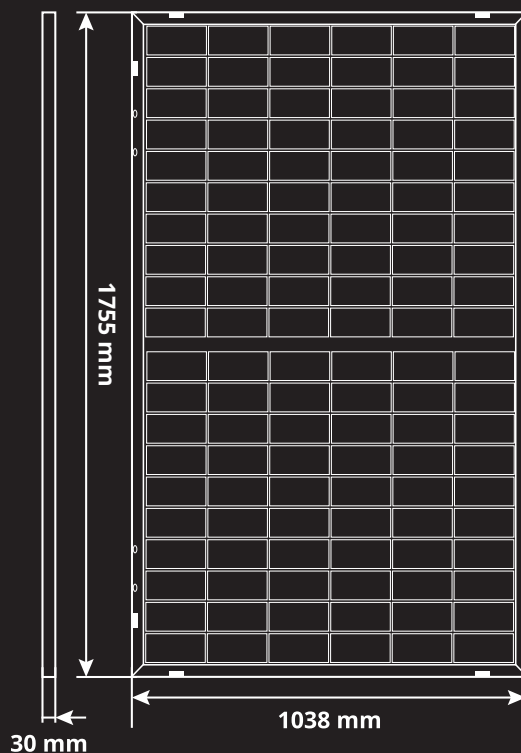

Temperature Characteristics

Nominal Operating Cell Temp. (NOCT)	44°C (±2°C)
Temperature Coefficient of Pmax	-0.255 %/°C
Temperature Coefficient of Voc	-0.235 %/°C
Temperature Coefficient of Isc	0.04 %/°C

Packaging Information

Container	40'HC
Pieces per pallet	36
Pallets per container	26
Pieces per container	936

Belinus M8 HJT All-In-One Warranty

VS

Conventional Solar Panel Warranty

35 years	Service Warranty	⊗
✓	Shipping - new part	⊗
✓	Shipping - old part	⊗
✓	Installation	⊗
35 years	Product Warranty	15 years
	Power Warranty	
100%	Start point	97%
0%	Yearly decline	0.7%
100%	End point (25 years)	80%
100%	End point (35 years)	⊗

BE-DSH2022 V7

All rights reserved. Subject to change. Errors excepted.

belinus

BELINUS SOLAR BV | Thor Park 8300, 3600 Genk, Belgium | TEL +32 (0) 16 91 03 14 | EMAIL info@belinus.be | WEB www.belinus.be