

## MONO CRYSTALLINE MODULE - SHINGLED CELL TECHNOLOGY

375 / 380 Watts







### Puma Series




### Superior Performance and Reliability

Shingled technology eliminates traditional ribbon connection with shingles connected in series. By removing the soldered ribbons, the active area of the module is improved and thermal stresses are reduced - resulting in exceptional efficiency and reliability over standard interconnections.

### Key Benefits

 Higher yield per surface area	 Low Pmax temperature Coefficient
 Higher yield in hot climate	 25 Years Limited Product Warranty
 Low LCOE	 Low Resistive Losses

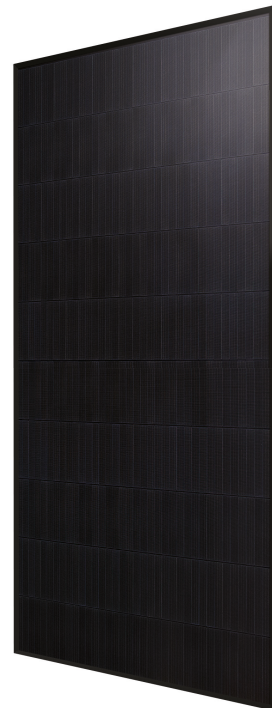

Outstanding performance under extreme heat as well as low intensity solar radiation



Industry leading low Pmax thermal coefficient



Positive Tolerance




100 % electro-luminescence tested

### Tests, Certifications and Warranties

Standard Tests	IEC 61215, IEC 61730
Factory Quality Tests	ISO 9001: 2015, ISO 14001: 2015
Certifications	Conformity to CE, PV CYCLE
Insurance	Product liability insurance provided by Allianz
Wind and Snow Loads Testing	Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
Power Tolerance	Guaranteed +0%/+5% (STC condition)
Warranties	<ul style="list-style-type: none"> <li>25-year limited product warranty</li> <li>15-year manufacturer warranty on 90.30% of the nominal performance</li> <li>25-year transferable linear power output warranty</li> </ul>

### Linear Performance Warranty

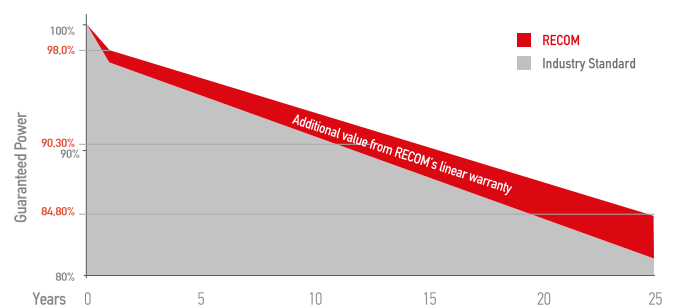

First Year Output	$\geq 98.0\%$	2-25 Year Decline	$\leq 0.55\%$	25 Year Output	$\geq 84.80\%$
-------------------	---------------	-------------------	---------------	----------------	----------------

MONO CRYSTALLINE MODULE - SHINGLED CELL TECHNOLOGY

RCM-xxx-SMK (xxx=375-380)


Electrical Characteristics

POWER CLASS <sup>(1)</sup>			375		380	
Testing Condition			STC	NMOT	STC	NMOT
Maximum Power	Pmax	[Wp]	375	282	380	286
Maximum Power Voltage	Vmp	[V]	40.4	38,5	40.6	38,7
Maximum Power Current	Imp	[A]	9,28	7,33	9,36	7,39
Open Circuit Voltage	Voc	[V]	48,9	46,6	49,1	46,8
Short Circuit Current	Isc	[A]	9,89	7,97	9,93	8,00
Module Efficiency	Eff	[%]	20,0		20,3	
Maximum Series Fuse	IR	[A]	20			
Maximum System Voltage	Vsys	[V]	1000V / 1500V DC (IEC)			
(1) Measurement Tolerances: Pmax (± 3%), Isc & Voc (± 5%) - Power Classification 0/+5W						
(2) STC (Standard Testing Condition): Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5						
(3) NMOT (Nominal Operating Module Temperature): Irradiance 800W/m², NMOT, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s						

Mechanical Data

Dimensions	1646mm x 1140mm x 35mm
Weight	20.5 Kg
Cell Type	PERC Mono-crystalline (158.75 mm) - G1
Front Glass	3.2mm Tempered and low iron glass + ARC
Backsheet	Anti-aging film
Frame	Black anodized aluminium alloy
Junction Box	IP68 (2 bypass diodes)
Connector	MC4 compatible connector
Cable	4,0mm² Length = 1000mm or customized

Dimensions

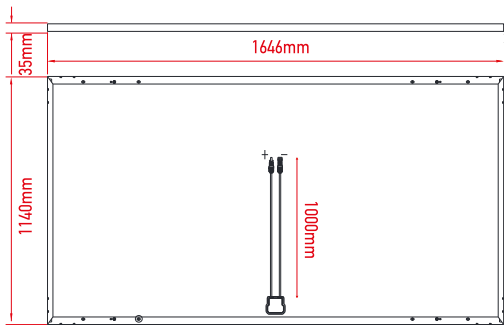


RECOM assumes no liability or responsibility for any typographical error, layout error, misinformation, any other error, omission, contained herein.

recom-solar.com

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, RECOM Solar reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Please read the safety and installation instructions before using the modules.

I-V Curve

The module relative power loss at low light irradiance of 200W/m² is less than 3%.

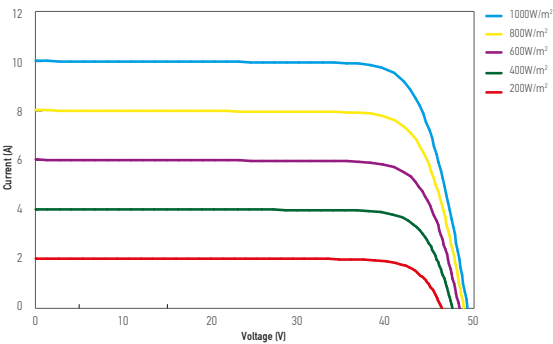

Temperature Characteristics

Pmax Temperature Coefficient	-0.34% / °C
Voc Temperature Coefficient	-0.27% / °C
Isc Temperature Coefficient	+0.04% / °C
Operating Temperature	-40~+85 °C
(NMOT) Nominal Module Operating Temperature	42.3 ± 2 °C

Packing Configuration

Container	40'HC
Pieces per Pallet	31
Pallets per Container	28
Pieces per Container	868