

INFINITY RT EXTREME

N-type


Bifacial Module with Double Glass

DMxxxG12RT-B48HBT

450~470W

23.5%
Max. Efficiency

- **Leading manufacturing**
40+ years experience in high-tech manufacturing.
- **High environmental, social and governance responsibility (ESG)**
100% green production, transparent supply chain and excellent ESG rating in the solar industry.

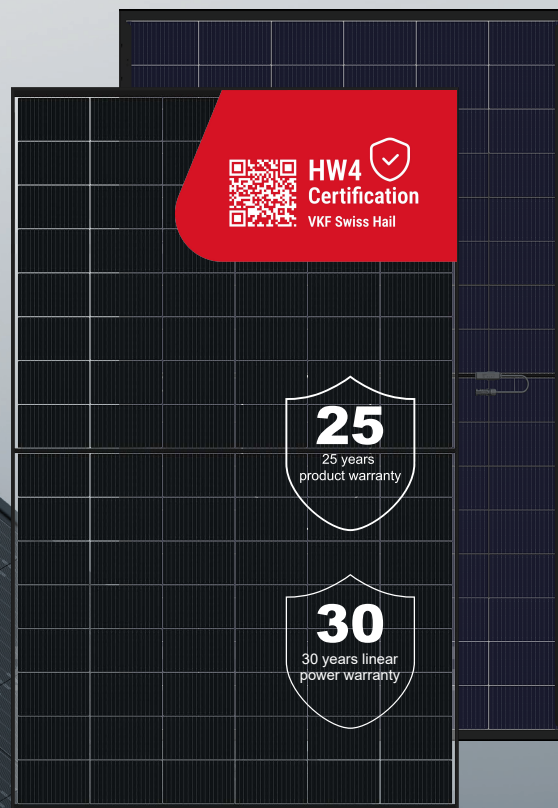

Advanced Design

Strong mechanical reliability up to 8100 Pa certified.



Extreme Hail Resistance


Certified HW4 with 40 mm ice balls & 100 km/h.



Green Product

Focus on circular economy - low carbon footprint, PFAS-free and recyclable components.

POWER WARRANTY

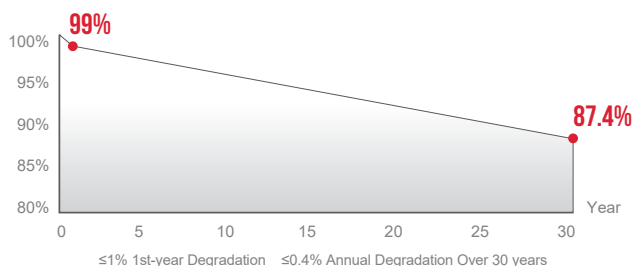

COMPANY MANAGEMENT SYSTEM

SA 8000: ILO Standards. Social responsibility standards
ISO 9001: Quality management system
ISO 14001: Environmental management system
ISO 45001: Occupational health and safety management system
ISO 50001: Energy management system
ISO 27001: Information security management system

PRODUCT CERTIFICATION

IEC 61215, IEC 61730
Ammonia Corrosion (IEC 62716)
Salt Mist Corrosion (IEC 61701)
LeTID (IEC TS 63342)
Dust & Sand (IEC 60068)



SolarPower
Europe



Warranty partner


Munich RE

DMxxxG12RT-B48HBT



Module Specification

Cell Type	N type Mono-crystalline, 96 (6×16)
Dimensions (mm)	1762×1134×30
Weight (kg)	29.6
Front Cover	3.2 mm fully tempered glass, Anti-reflective coating
Rear Cover	2 mm heat strengthened glass
Junction Box	3 Diodes, IP68 according to IEC 62790
Output Cables (Including Connector)	4 mm ² /Portrait: 300 mm (+) /200 mm (-) Landscape: 1100 mm (+) /1100 mm (-) Length can be customized
Connector Type	PV-ZH202B or MC4-EVO 2A (1500V)

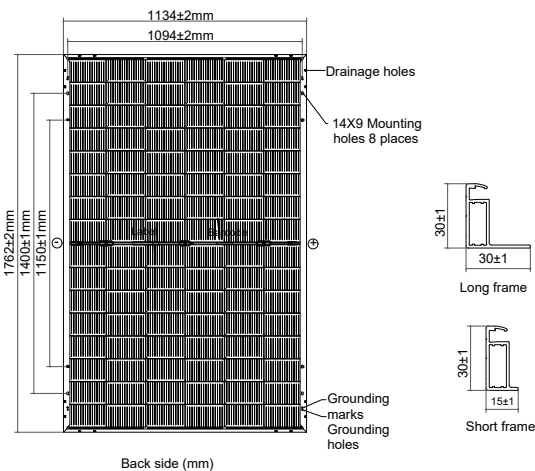

Electrical Specifications¹

Module Type	DM450G12RT-B48HBT		DM455G12RT-B48HBT		DM460G12RT-B48HBT		DM465G12RT-B48HBT		DM470G12RT-B48HBT	
Testing Condition	STC ²	NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (P _{max} /W)	450	343	455	347	460	351	465	354	470	358
Maximum Power Current (I _{mp} /A)	14.79	12.02	14.83	12.05	14.87	12.08	14.91	12.11	14.95	12.15
Maximum Power Voltage (V _{mp} /V)	30.43	28.55	30.69	28.80	30.95	29.04	31.21	29.28	31.47	29.53
Short-circuit Current (I _{sc} /A)	15.73	12.68	15.78	12.72	15.83	12.76	15.88	12.80	15.93	12.84
Open-circuit Voltage (V _{oc} /V)	36.04	34.69	36.18	34.82	36.32	34.96	36.46	35.09	36.60	35.22
Module Efficiency STC (%)	22.5		22.8		23.0		23.3		23.5	

¹ Measurements according to IEC 60904-3, Measurement tolerance: I_{sc}: ±4%, V_{oc}: ±3%, Test uncertainty for P_{max}: ±3%, Bifaciality: 80%±5%

² STC (Standard Test Condition): Radiation 1000 W/m², Module temperature 25°C, AM = 1.5

³ NMOT: Radiation 800 W/m², Ambient temperature 20°C, AM = 1.5, Wind Speed 1 m/s



Electrical Specifications¹ (BNPI²)

Nameplate Power (W)	450	455	460	465	470
Maximum Power (P _{max} /W)	497	503	508	514	519
Maximum Power Current (I _{mp} /A)	16.32	16.37	16.41	16.45	16.50
Maximum Power Voltage (V _{mp} /V)	30.47	30.73	30.99	31.25	31.51
Short-circuit Current (I _{sc} /A)	17.31	17.36	17.42	17.47	17.53
Open-circuit Voltage (V _{oc} /V)	36.04	36.18	36.32	36.46	36.60

¹ Measurements according to IEC 60904-3, Measurement tolerance: I_{sc}: ±4%, V_{oc}: ±3%, Test uncertainty for P_{max}: ±3%

² BNPI: Front radiation 1000 W/m², Rear radiation 135 W/m², Module temperature 25°C, AM = 1.5



Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42±2°C
Temperature Coefficient of P _{max} (%/°C)	-0.29
Temperature Coefficient of V _{oc} (%/°C)	-0.25
Temperature Coefficient of I _{sc} (%/°C)	+0.048



Packaging

Container	40HQ
Pallet Dimensions (mm)	1800x1140x1250
Pieces per Pallet	36
Pieces per Container	792




Operating Conditions

Operating Temperature (°C)	-40 to +85
Maximum System Voltage (V)	1500 DC (IEC)
Overcurrent Protection Rating (A)	30
Power Output Tolerance (%)	0~3
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 8100 / Back 3600
Max. Design Load, Push/Pull (Pa)	Front 5400 / Back 2400
Hail Class	HW4*

* Reference diameter of ice balls-VKF 40mm, Ice ball storage temperature -20°C.

Current-Voltage Curve (470W)

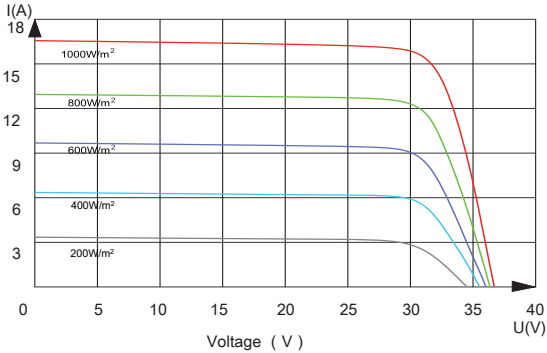

Hengdian Group DMEGC Magnetics Co.,Ltd.
Add: Hengdian Industrial Zone, Dongyang City Zhejiang Province, China 322118
Tel: 0086-579-8658-8826 E-mail: solar@dmegec.com.cn Website: www.dmegecsolar.com

DMEGC Renewable Energy B.V.
Add: Industrieweg 2,2641 RM Pijnacker, The Netherlands.
Tel: +31 (0) 8 58200765 E-mail: contact@dmegec.eu

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail. All information in this data sheet corresponds to EN 50380.Changes and errors excepted. Document: EN DS-G12RT-B48HBT-Extreme-20250702.

©DMEGC 2025 – All Rights Reserved